


**The most important part of the roof?
All of them.**



It takes more than just shingles to protect a home. It takes an integrated system of components and layers designed to withstand the forces of nature outside while controlling temperature and humidity inside. The Owens Corning® Total Protection Roofing System™^ gives your customers the assurance that all of their Owens Corning® roofing components are working together to help increase the performance of the roof — and to enhance the comfort and enjoyment of those who live beneath it.

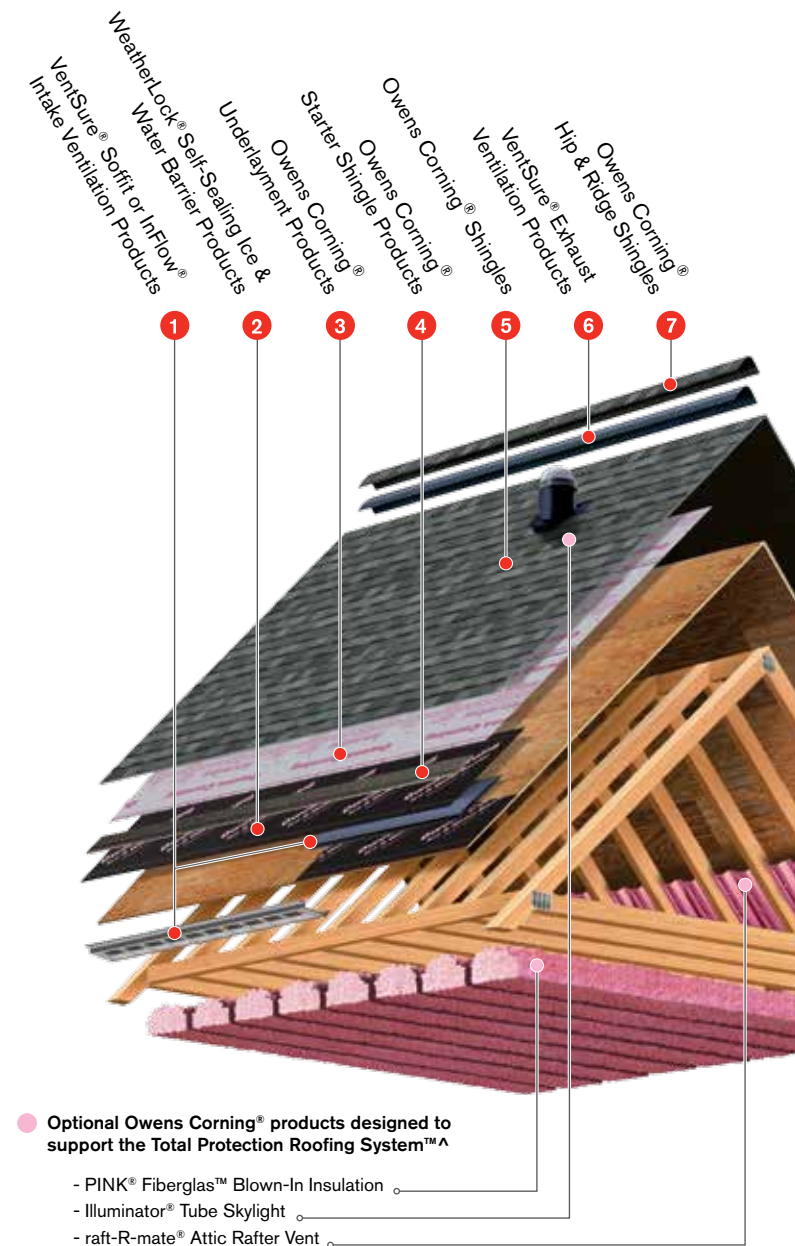

^Excludes non-Owens Corning® roofing products such as flashing, fasteners and wood decking.

Save time and limit roof deck penetrations.



One RidgeCat™ 20-ft. roll delivers the same ventilation as six standard, off-ridge vents.

Product Specifications

Net Free Vent Area (NFVA)	300 sq. in. per roll; 15 sq. in. per lineal ft.
Nominal Length	20 ft.
Nominal Width	11 in.
Nominal Height	5/8 in.
Nominal Weight	3.6 lbs.
Base Material	Nylon 6
Allowable Roof Pitch	2:12 to 18:12

Applicable Standards and Codes

- ASTM E108/UL 790 (Class C Fire Resistance)
- FBC — TAS100(A) Wind-Driven Rain up to 110 MPH
- Florida Product Approval
- ICC-ES AC132#
- UL ER21292-01

Shipping Specifications

Name	Color	Material Code	Short Code	Unit	Rolls/Pallet	Pallets/Truckload	Rolls/Truckload
VentSure® RidgeCat™ Roll Vent — 11"	Black	749455	RCAT11	1 Roll	36	52	1,872
VentSure® RidgeCat™ Roll Vent — 11" w/nails**	Black	749559	RCAT11N	1 Roll	36	52	1,872



* See actual warranty for complete details, limitations and requirements.
** Available in certain regions.
International Code Council Evaluation Services Acceptance Criteria for Attic Vents.


OWENS CORNING ROOFING AND ASPHALT, LLC
ONE OWENS CORNING PARKWAY
TOLEDO, OHIO, USA 43659
1-800-GET-PINK®
www.owenscorning.com/roofing

Pub. No. 10019489-A. Printed in U.S.A. May 2015. THE PINK PANTHER™ & © 1964–2015 Metro-Goldwyn-Mayer Studios Inc. All Rights Reserved. The color PINK is a registered trademark of Owens Corning. © 2015 Owens Corning. All Rights Reserved.

(Atlanta, Brookville, Denver, Irving, Jacksonville, Kearny, Medina, Memphis, Minneapolis, Savannah, Summit)



**VentSure®
RidgeCat™ Rolled Ridge Vent**

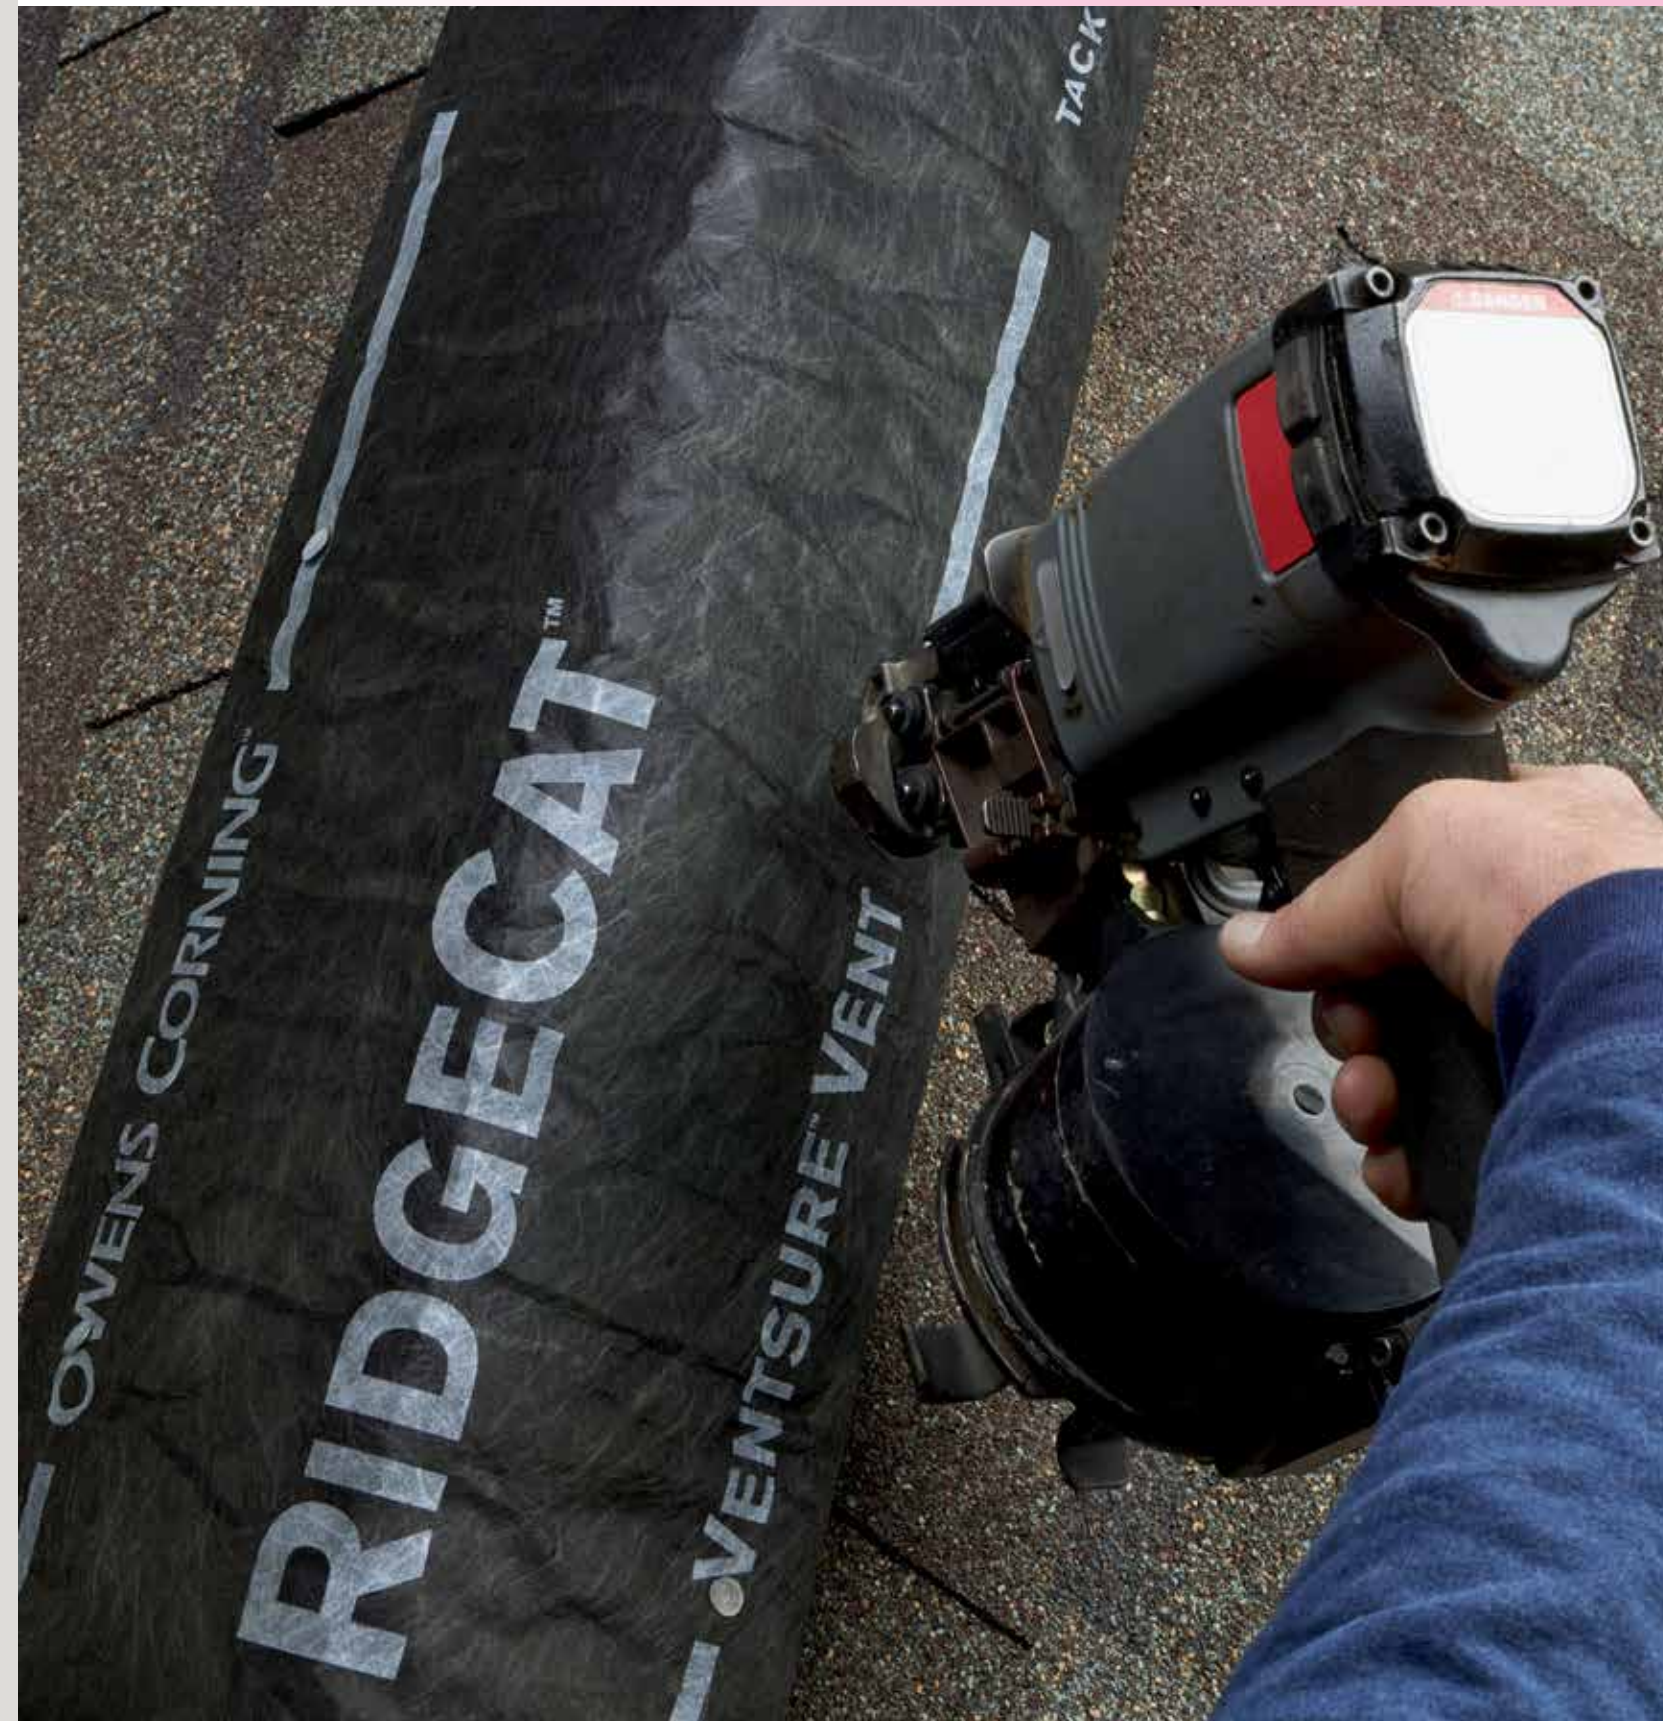

VentSure® RidgeCat™ Rolled Ridge Vent is a component of the Owens Corning® Total Protection Roofing System™^

Designed for fast, easy installation.

Designed with the help of professional roofing contractors, the RidgeCat™ Rolled Ridge Vent installs quickly and easily while providing long-lasting ventilation performance.

- Nylon entangled-net structure is more than 50% lighter than other rolled vent products
- 20-ft. roll lays flat when unrolled and flexes easily over the ridge
- Nail-gun-friendly, double-density compression edge adds strength and provides excellent holding power
- Clear markings provided for nailing and centering over the ridge
- No end plugs required



Performance and durability — all rolled into one.



Looks as great as it performs.

RidgeCat™ provides durability, a high net free vent area (NFVA), and a clean, finished look to the roofline.

- Open-net structure for excellent ventilation performance. NFVA = 300 sq. in./roll (15 sq. in./LF)
- Breathable UV filter protects against wind-driven rain up to 110 MPH and helps prevent dust and insect infiltration
- 20-ft. rolls save time and limit roof deck penetrations
- Low-profile design and straight edge provide a sleek, finished appearance that is virtually invisible from the street



Low profile design

A healthy roof starts with a well-ventilated attic.


A roof is made up of many components, all working together to provide strength and long-lasting protection. But in order for these components to protect against the weather outside, you need to ensure the proper conditions inside your attic.

VentSure® Balanced Air Ventilation System.

The VentSure® Balanced Air Ventilation System features a variety of intake and exhaust solutions designed to control attic heat and humidity that can compromise the roof system. Best of all, as part of the Total Protection Roofing System,™^ all VentSure® intake and exhaust products are designed to work together to deliver quality and performance.


The Benefits of Proper Ventilation:

- Allows outside air to flow through the attic, promoting a cooler, drier attic space
- May help prevent condensation and mold growth in the attic
- Provides year-round ventilation performance, which may reduce energy consumption

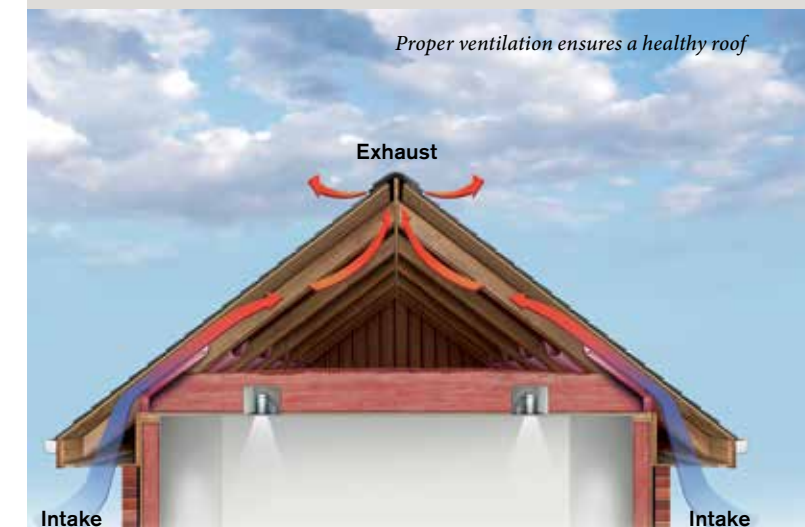

Designed to work together.

VentSure® RidgeCat™ Rolled Ridge Vent complements the VentSure® InFlow® Vent for a balanced system of intake and exhaust.

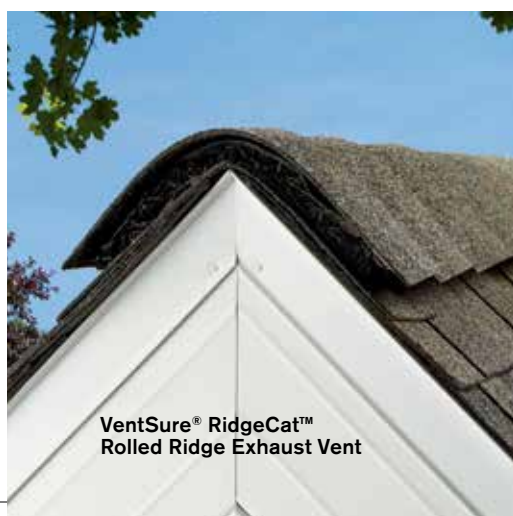

VentSure® RidgeCat™
Rolled Ridge Exhaust Vent



VentSure® InFlow®
Intake Vent

Provides a lifetime of protection.

RidgeCat™ carries a Limited Lifetime Warranty* when installed with other Owens Corning® roofing products as part of the Total Protection Roofing System.™^



Designed for fast, easy installation.

Designed with the help of professional roofing contractors, the RidgeCat™ Rolled Ridge Vent installs quickly and easily while providing long-lasting ventilation performance.

- Nylon entangled-net structure is more than 50% lighter than other rolled vent products
- 20-ft. roll lays flat when unrolled and flexes easily over the ridge
- Nail-gun-friendly, double-density compression edge adds strength and provides excellent holding power
- Clear markings provided for nailing and centering over the ridge
- No end plugs required



Performance and durability — all rolled into one.



Looks as great as it performs.

RidgeCat™ provides durability, a high net free vent area (NFVA), and a clean, finished look to the roofline.

- Open-net structure for excellent ventilation performance. NFVA = 300 sq. in./roll (15 sq. in./LF)
- Breathable UV filter protects against wind-driven rain up to 110 MPH and helps prevent dust and insect infiltration
- 20-ft. rolls save time and limit roof deck penetrations
- Low-profile design and straight edge provide a sleek, finished appearance that is virtually invisible from the street



Low profile design

A healthy roof starts with a well-ventilated attic.


A roof is made up of many components, all working together to provide strength and long-lasting protection. But in order for these components to protect against the weather outside, you need to ensure the proper conditions inside your attic.

VentSure® Balanced Air Ventilation System.

The VentSure® Balanced Air Ventilation System features a variety of intake and exhaust solutions designed to control attic heat and humidity that can compromise the roof system. Best of all, as part of the Total Protection Roofing System,™^ all VentSure® intake and exhaust products are designed to work together to deliver quality and performance.

The Benefits of Proper Ventilation:

- Allows outside air to flow through the attic, promoting a cooler, drier attic space
- May help prevent condensation and mold growth in the attic
- Provides year-round ventilation performance, which may reduce energy consumption

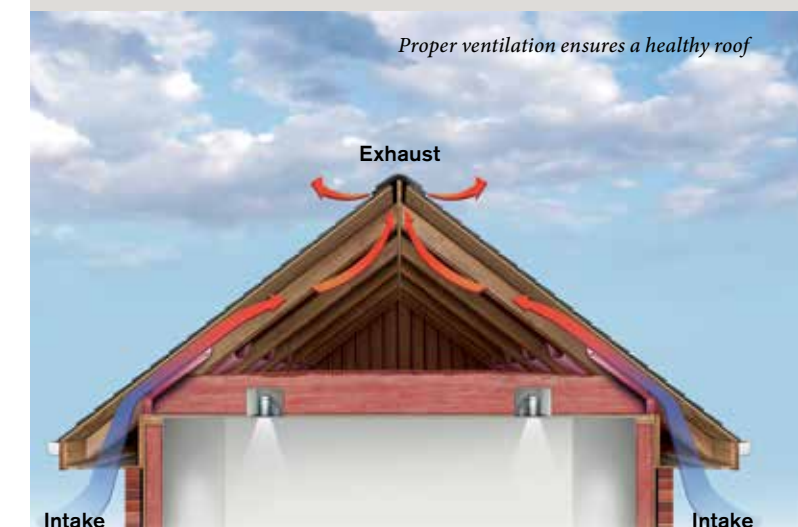

Proper ventilation ensures a healthy roof

Designed to work together.

VentSure® RidgeCat™ Rolled Ridge Vent complements the VentSure® InFlow® Vent for a balanced system of intake and exhaust.



VentSure® RidgeCat™
Rolled Ridge Exhaust Vent



VentSure® InFlow®
Intake Vent

Provides a lifetime of protection.


RidgeCat™ carries a Limited Lifetime Warranty* when installed with other Owens Corning® roofing products as part of the Total Protection Roofing System.™^



**The most important part of the roof?
All of them.**



It takes more than just shingles to protect a home. It takes an integrated system of components and layers designed to withstand the forces of nature outside while controlling temperature and humidity inside. The Owens Corning® Total Protection Roofing System™^ gives your customers the assurance that all of their Owens Corning® roofing components are working together to help increase the performance of the roof — and to enhance the comfort and enjoyment of those who live beneath it.

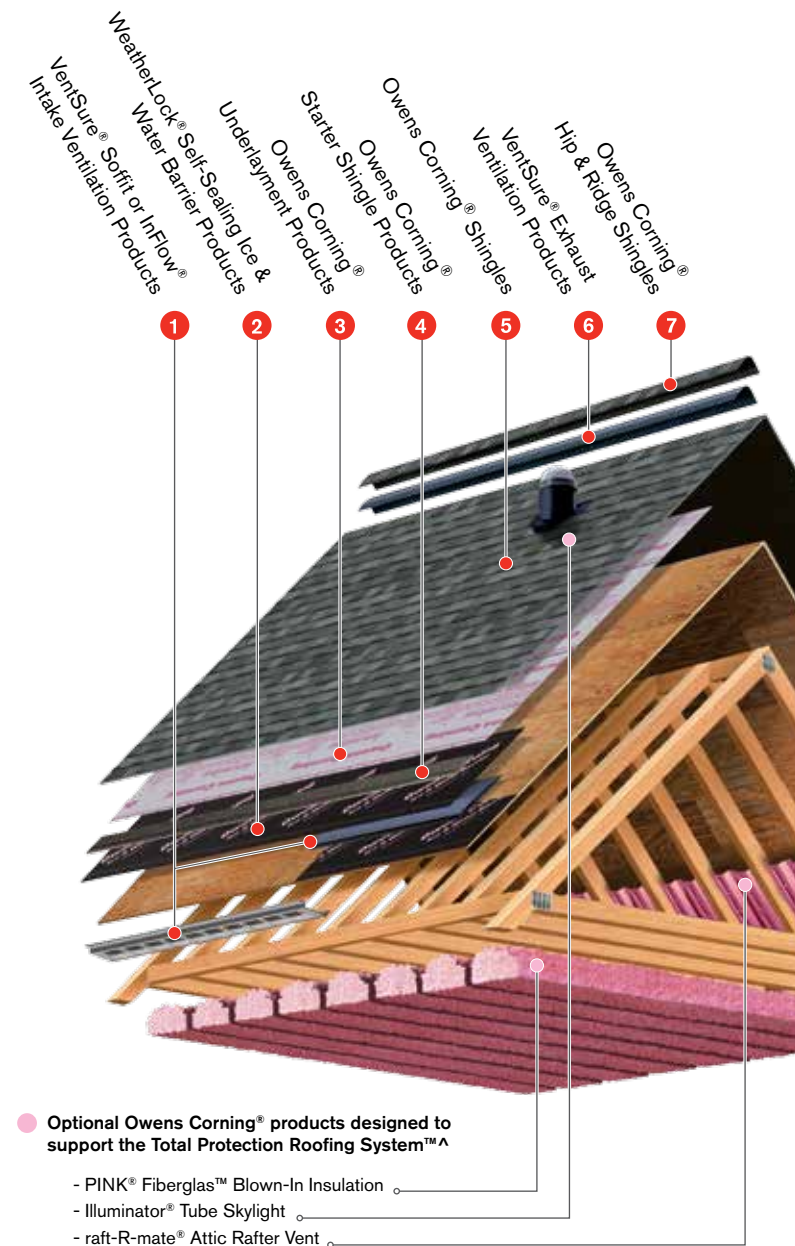

^Excludes non-Owens Corning® roofing products such as flashing, fasteners and wood decking.

Save time and limit roof deck penetrations.



One RidgeCat™ 20-ft. roll delivers the same ventilation as six standard, off-ridge vents.

Product Specifications

Net Free Vent Area (NFVA)	300 sq. in. per roll; 15 sq. in. per lineal ft.
Nominal Length	20 ft.
Nominal Width	11 in.
Nominal Height	5/8 in.
Nominal Weight	3.6 lbs.
Base Material	Nylon 6
Allowable Roof Pitch	2:12 to 18:12

Applicable Standards and Codes

- ASTM E108/UL 790 (Class C Fire Resistance)
- FBC — TAS100(A) Wind-Driven Rain up to 110 MPH
- Florida Product Approval
- ICC-ES AC132#
- UL ER21292-01

Shipping Specifications

Name	Color	Material Code	Short Code	Unit	Rolls/Pallet	Pallets/Truckload	Rolls/Truckload
VentSure® RidgeCat™ Roll Vent — 11"	Black	749455	RCAT11	1 Roll	36	52	1,872
VentSure® RidgeCat™ Roll Vent — 11" w/nails**	Black	749559	RCAT11N	1 Roll	36	52	1,872



* See actual warranty for complete details, limitations and requirements.
** Available in certain regions.
International Code Council Evaluation Services Acceptance Criteria for Attic Vents.


OWENS CORNING ROOFING AND ASPHALT, LLC
ONE OWENS CORNING PARKWAY
TOLEDO, OHIO, USA 43659
1-800-GET-PINK®
www.owenscorning.com/roofing

Pub. No. 10019489-A. Printed in U.S.A. May 2015. THE PINK PANTHER™ & © 1964–2015 Metro-Goldwyn-Mayer Studios Inc. All Rights Reserved. The color PINK is a registered trademark of Owens Corning. © 2015 Owens Corning. All Rights Reserved.

(Atlanta, Brookville, Denver, Irving, Jacksonville, Kearny, Medina, Memphis, Minneapolis, Savannah, Summit)



**VentSure®
RidgeCat™ Rolled Ridge Vent**

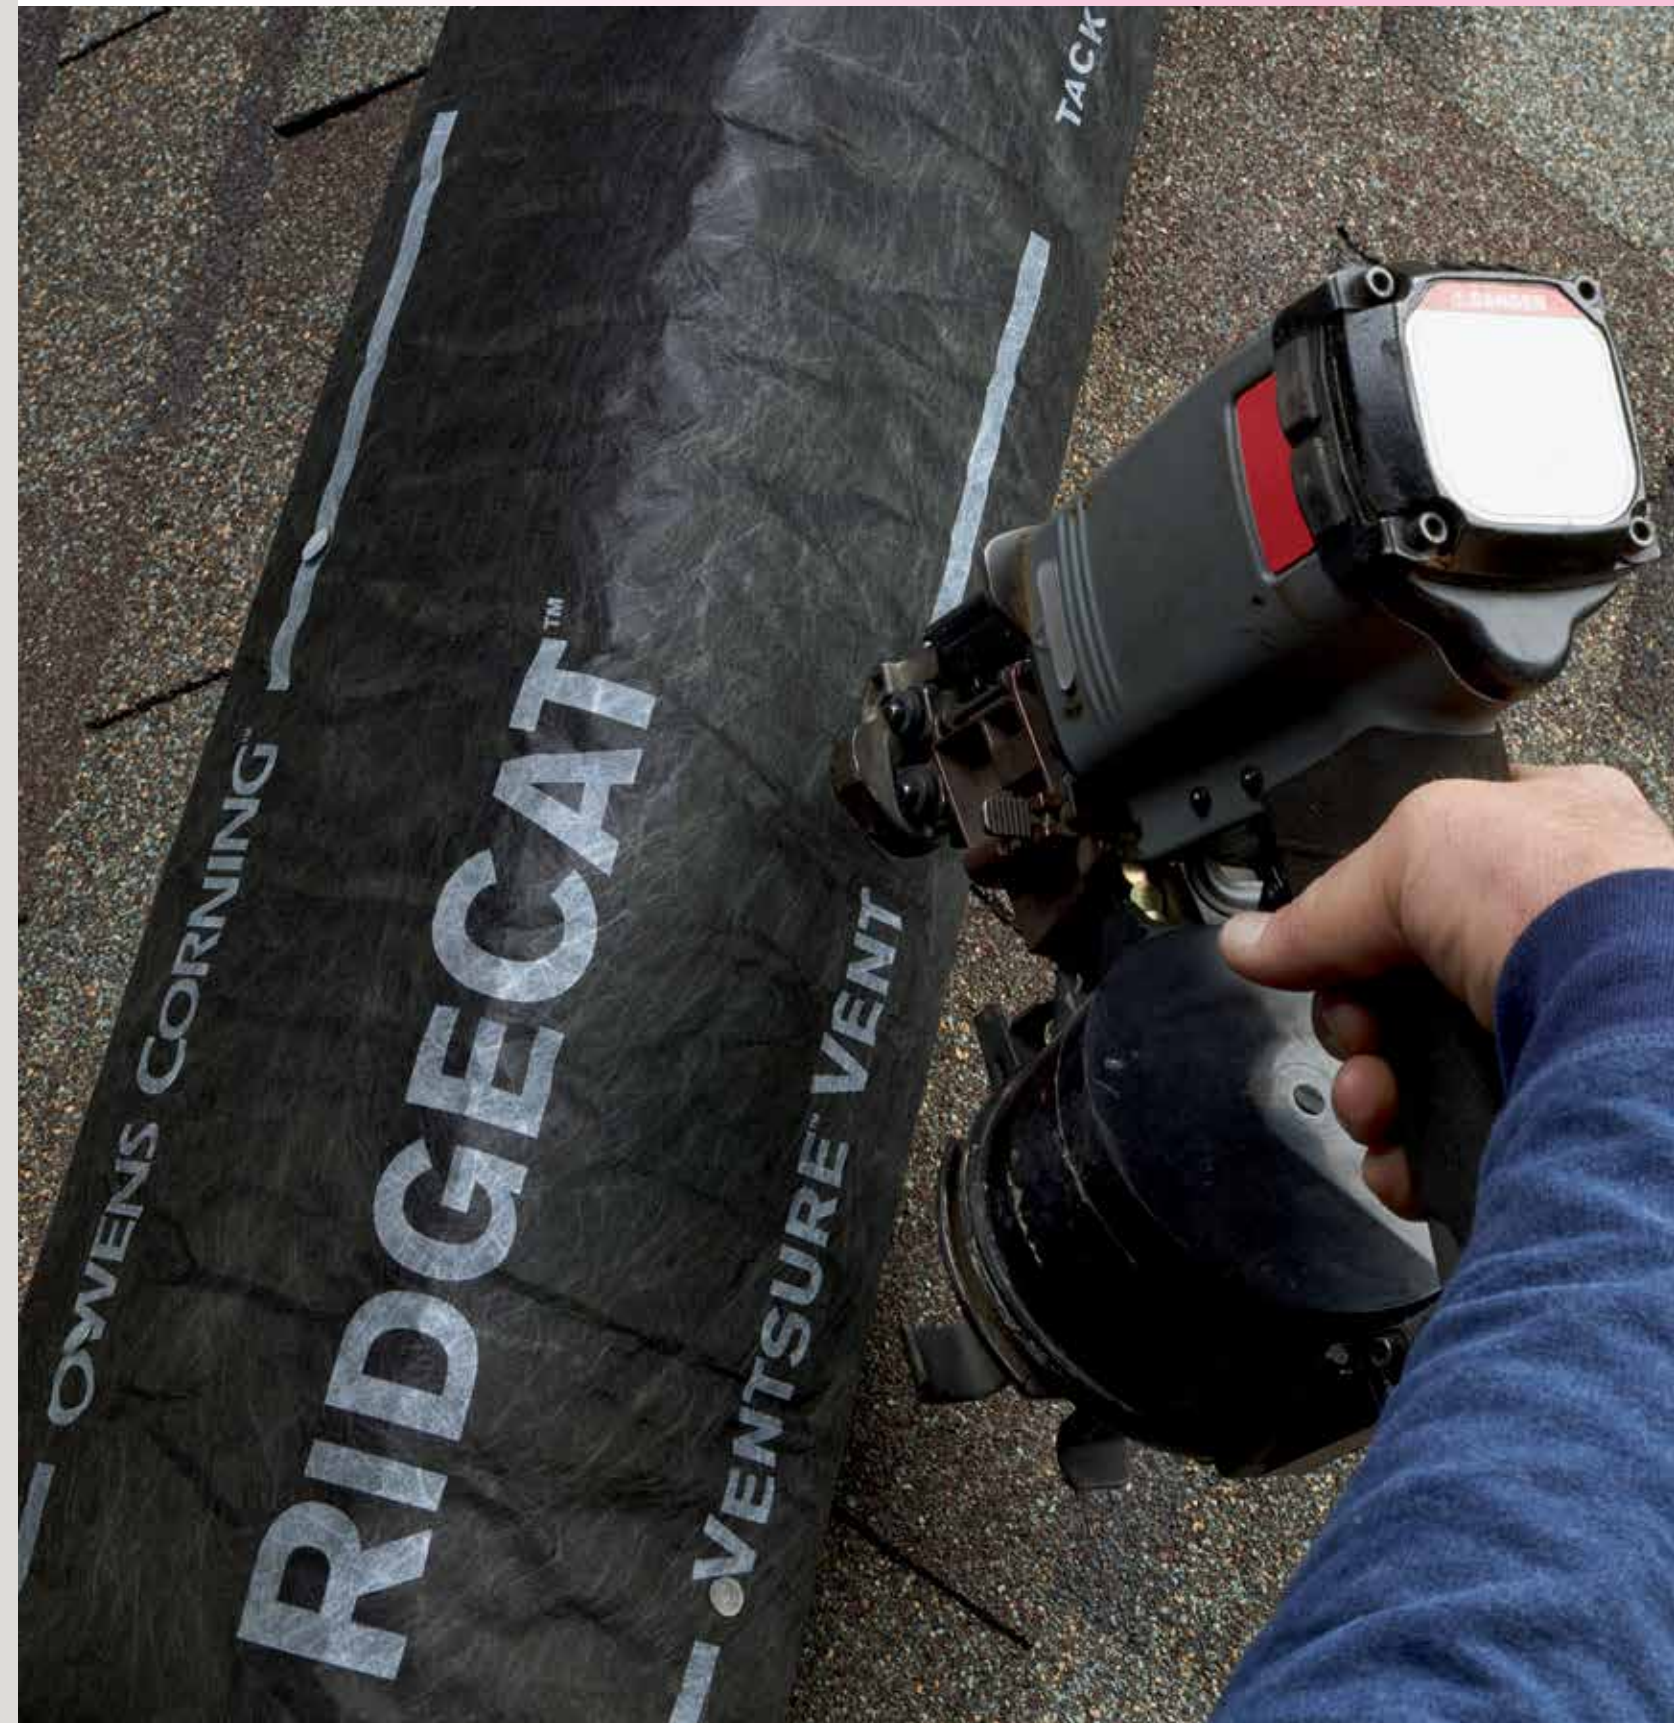

VentSure® RidgeCat™ Rolled Ridge Vent is a component of the Owens Corning® Total Protection Roofing System™^